

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/000881

International filing date: 08 March 2005 (08.03.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB  
Number: 0406748.4  
Filing date: 26 March 2004 (26.03.2004)

Date of receipt at the International Bureau: 21 April 2005 (21.04.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

A handwritten signature in cursive script, appearing to read 'P. Beheren'.

Dated 24 March 2005



Patents Form 1/77

Patents Act 1977  
(Rule 16)THE PATENT OFFICE  
RN

26 MAR 2004

RECEIVED BY FAX

**Request for grant of a patent***(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)*26MAR04 E881799-1 D02805  
P01/7700 0.00-0406748.4 ACCOUNT CHA

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

M04B128GB/ASB

2. Patent application number

0406748.4

26 MAR 2004

*(The Patent Office will fill this part in)*3. Full name, address and postcode of the or of each applicant *(underline all surnames)*

The BOC Group plc, Cherisey Road, Windlesham, Surrey, GU20 6HJ

Patents ADP number *(if you know it)*

884627002

7975949001

If the applicant is a corporate body, give the country/state of its incorporation

England

4. Title of the invention

VACUUM PUMP

5. Name of your agent *(if you have one)*

Andrew Steven BOOTH

*"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)*

The BOC Group plc, Cherisey Road, Windlesham, Surrey, GU20 6HJ

Patents ADP number *(if you know it)*

7975949001

6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.

Country

Priority application number  
*(if you know it)*Date of filing  
*(day / month / year)*7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute *(see note D)*

Number of earlier UK application

Date of filing  
*(day / month / year)*

8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request?

YES

Answer YES if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

Otherwise answer NO *(See note C)*

Patents Form 1/77

**Patents Form 1/77**

9. Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form	0	
Description	6	✓
Claim(s)	2	✓
Abstract	1	✓
Drawing(s)	3	✓

10. If you are also filing any of the following, state how many against each item.

Priority documents	0
Translations of priority documents	0
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	0
Request for a preliminary examination and search (Patents Form 9/77)	1 ✓
Request for a substantive examination (Patents Form 10/77)	0
Any other documents (please specify)	0

11. I/We request the grant of a patent on the basis of this application.

Signature(s)

*AS P.A.*

Date 26/03/2004

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom

Andrew Booth  
(01276) 807612

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered YES in part 8, a Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with the priority details.

DUPLICATE

M04B128GB/ASB

- 1 -

VACUUM PUMP

The present invention relates to a vacuum pump.

- 5 Vacuum pumping arrangements used to pump fluid from semiconductor tools typically employ, as a backing pump, a multi-stage positive displacement pump employing inter-meshing rotors. The rotors may have the same type of profile in each stage or the profile may change from stage to stage.
- 10 Many semiconductor processes use or generate potentially flammable mixtures containing fuels such as hydrogen and silane. The pumping of such mixtures requires great care to be placed on the leak integrity of the foreline and exhaust lines from the pump to ensure that there is no ingress of air into the lines which could create a flammable atmosphere. Moreover, in some processes a fuel and
- 15 an oxidant, for example TEOS (tetraethoxysilane) and ozone, may flow through the pump at the same time. In such circumstances any hot spots within the pump could provide intermittent ignition sources for the fuel, which could result in the generation of hazardous flame fronts travelling through the pump into the exhaust lines.
- 20 It is an aim of at least the preferred embodiments of the present invention to seek to solve these and other problems.
- In one aspect, the present invention provides a vacuum pump comprising a
- 25 continuous ignition source for igniting fuel within a pumped fluid to regulate the concentration of the fuel in fluid exhaust from the pump.
- By introducing a continuous ignition source into the pump, a reaction between any fuel/oxidant mixtures within the pumped fluid, which, within the pump, will be at a
- 30 relatively low fluid pressure, can be deliberately initiated. By deliberately initiating the reaction at a controlled location, it can be ensured that the pressure rise generated by such reactions (usually around ten times the start pressure) will be



- 2 -

M04B128GB/ASB

less than atmospheric pressure, so that the reactions can be confined within the pump and thereby pose little or no hazard.

Regulating the concentration of fuel in the fluid exhaust from the pump to below its lower explosion limit (LEL) can minimise the likelihood of a flammable atmosphere being created downstream from the pump outlet by, for example, a leak in the exhaust line from the pump. To achieve this, the reactions initiated within the pump need not be complete prior to the exhaust of the fuel from the pump. Furthermore, deliberately reacting the fluid to maintain the fuel concentration below its LEL can minimise the amount of purge fluid, such as nitrogen, which would otherwise be required to reduce the fuel concentration below its LEL, thereby saving costs.

The continuous ignition source may be provided in any convenient form, for example, by an electric discharge device, spark plug, heated filament, glow discharge or other plasma source.

In the preferred embodiments, the pump is in the form of a multi-stage vacuum pump, with the continuous ignition source being located between adjacent stages of the pump. Thus, in a second aspect the present invention provides a multi-stage vacuum pump comprising, between adjacent stages of the pump, a continuous ignition source for igniting a fuel within a pumped fluid.

The pump preferably comprises a plurality of continuous ignition sources each located between respective adjacent stages of the pump. By introducing into the pump continuous ignition sources at respective locations between which the fluid pressure varies from, say, 50mbar to 950mbar, any fuel/oxidant mixtures within the pumped fluid will react over a range of pressures existing within the pump. Spreading the reaction over a range of pressures can ensure that the pressure rise generated within the pump by fuel ignition will be less than atmospheric pressure.

- 3 -

M04B128GB/ASB

In view of the reactions deliberately initiated within the pump, it may be necessary to increase the amount of coolant supplied to the pump. In one preferred embodiment the continuous ignition source is provided within a combustion chamber located between stages of the pump. Confining at least part of the reaction to within a combustion chamber can facilitate the provision of additional cooling to the pump.

The pump may be provided with means for injecting into the pump a fluid stream comprising an oxidant, for example, air, clean dry air (CDA) or oxygen, for assisting in igniting the fuel. This fluid stream may also, or alternatively, comprise a fuel for increasing the likelihood of ignition occurring within the pump. Deliberate introduction of an oxidant and/or fuel into the pump can increase the likelihood of fuel combustion within the pump. This fluid stream can be conveniently injected into the pump between adjacent stages of the pump, for example, through a port provided for the injection into the pump of a purge gas such as nitrogen. Where a combustion chamber is provided within the pump, the fluid stream is preferably injected directly into this chamber.

In a further aspect, the present invention provides a method of treating a fluid containing a fuel, the method comprising conveying the fluid to a vacuum pump and, within the pump, igniting the fuel to regulate the concentration of the fuel in fluid exhaust from the pump.

Preferred features of the present invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 is a cross-section of a known multi-stage pump;

Figure 2 is a cross-section of a first embodiment of a multi-stage pump; and

Figure 3 is a cross-section of a second embodiment of a multi-stage pump.



- 4 -

M04B128GB/ASB

Figure 1 illustrates an example of a known multi-stage pump 10. The pump comprises a pumping chamber 12 through which pass a pair of parallel shafts 14 (only one shown). One shaft 14 is drivable via a motor 16. Adjacent the motor 16 each shaft 14 carries a timing gear 18.

5

Each shaft 14 supports for rotation therewith a plurality of rotors. In this example, each shaft carries, or has integral therewith, four rotors 20, 22, 24 and 26, although the pump may carry any number of rotors. The rotors are arranged in complementary pairs, and the pairs are arranged in tandem on their respective shafts 14. The rotors may have a Roots profile, Northey (or "claw") profile or screw profile. The rotors may have the same type of profile in each stage or the profile may change from stage to stage. For example, rotors having a screw profile may vary in pitch from stage to stage.

10 The pumping chamber 12 is divided by partitions 28, 30 and 32 into four spaced locations each occupied by a pair of rotors. An inlet 34 of the pumping chamber 12 communicates directly with the location occupied by the rotors 20, and an outlet 36 of the pumping chamber 12 communicates directly with the location occupied by rotors 26. Fluid passageways 38, 40, 42 and 43 are provided to permit the passage therethrough of pumped fluid from the inlet 34 to the outlet 36, the flow of pumped fluid from the outlet being controlled by one-way valve 44.

15 In use, when the motor drives one shaft 14, by means of the timing gears 18 both shafts 14 will be driven in synchronisation thereby driving the various pairs of profiled rotors 20 to 26 synchronously. Fluid to be pumped will enter the inlet 34 and will be pumped successively through passageways 38, 40, 42, 43 until it exits via the outlet 36 as indicated by the arrows. The pump can attain a high vacuum (for example, around or below 0.01mbar) without the use of lubricants within the pumping chamber. It can maintain a high pumping capacity at low pressures and can compress the pumped fluid to at least atmospheric pressure.

25  
30

- 5 -

M04B128GB/ASB

Figure 2 illustrates a first embodiment of a multi-stage pump 100 according to the present invention. In Figure 2, for simplicity the pump 100 is represented as a modification of the pump shown in Figure 1, although of course the pump 100 could vary from the pump 10 in relation to, for example, the number and size of the rotors, the locations of the inlet, outlet and fluid passages therebetween, the location and nature of the coupling 16, and so on. As illustrated, the pump 100 varies from the known pump 10 in that the pump 100 includes at least one continuous ignition source for fuel contained in the pumped fluid. By providing deliberate, continuous ignition of the fuel within the pump 100, the concentration of fuel within the fluid exhaust from the pump 100 can be maintained below its lower explosive limit (LEL).

In the embodiment illustrated, the pump 100 includes two ignition sources 102a, 102b each located between adjacent stages of the pump 100, that is, ignition source 102a being located between rotors 22 and 24, and ignition source 102b being located between rotors 24 and 26. Alternatively, the pump 100 may comprise an ignition source between each adjacent stage. Two or more ignitions sources may be provided between each pumping stage as appropriate. By introducing into the pump continuous ignition sources at respective locations between which the fluid pressure varies from, say, 50mbar to 950mbar, any fuel / oxidant mixtures within the pumped fluid will react over a range of pressures existing within the pump. Spreading the reaction over a range of pressures can ensure that the pressure rise generated within the pump by fuel ignition will be less than atmospheric pressure so as to confine fluid combustion to within the pump 100.

Each ignition source may be provided in any convenient form, for example, by an electric discharge device, spark plug, heated filament, glow discharge or other plasma source.

In order to assist in the combustion of fuel within the pumped fluid, an oxidant such as CDA or oxygen can be injected into the pump 100 through a purge port 104.

- 6 -

M04B128GB/ASB

This can be advantageous where the pumped fluid contains an insufficient amount of oxidant for combustion to be initiated within the pump. In order to increase the likelihood of combustion taking place within the pump, this injected fluid may optionally comprise a fuel, or a mixture of fuel and oxidant.

5

In view of the reactions deliberately initiated within the pump, it may be necessary to increase the amount of coolant supplied to the pump. In the embodiment shown in Figure 3, the size of the fluid passageway 43 has been increased to define a combustion chamber between pumping stages of the pump 200. This can facilitate the provision of additional cooling to the pump.

10

The invention has been described above in relation to a multi-stage dry pump, but one or more continuous ignition sources may also be used in a single stage pump, for example, a screw pump with a continuous ignition source located within a wrap or a volume created in the stator.

15

- 7 -

M04B128GB/ASB

**CLAIMS**

1. A vacuum pump comprising a continuous ignition source for igniting  
5 fuel within a pumped fluid to regulate the concentration of the fuel in  
fluid exhaust from the pump.
2. A pump according to Claim 1, wherein the continuous ignition source  
is an electric discharge device.  
10
3. A pump according to Claim 1 or Claim 2, wherein the continuous  
ignition source is a spark plug.
4. A pump according to Claim 1, wherein the continuous ignition source  
15 is a heated filament.
5. A pump according to Claim 1, wherein the continuous ignition source  
is a plasma.
- 20 6. A pump according to any preceding claim in the form of a multi-stage  
vacuum pump, the continuous ignition source being located between  
adjacent stages of the pump.
7. A multi-stage vacuum pump comprising, between adjacent stages of  
25 the pump, a continuous ignition source for igniting a fuel within a  
pumped fluid.
8. A pump according to Claim 6 or Claim 7, wherein the continuous  
ignition source is located within a combustion chamber located  
30 between stages of the pump.

- 8 -

M04B128GB/ASB

9. A pump according to any of Claims 6 to 8, comprising a plurality of continuous ignition sources each located between respective adjacent stages of the pump.
- 5 10. A pump according to any preceding claim, wherein the pressure of pumped fluid at the ignition source or each respective source is in the range from 50 to 950 mbar.
- 10 11. A pump according to any preceding claim, comprising means for injecting into the pump a fluid stream comprising an oxidant for assisting in igniting the fuel.
12. A pump according to Claim 11, wherein the oxidant is one of oxygen and CDA.
- 15 13. A pump according to Claim 11 or Claim 12, wherein the injected fluid stream also comprises a fuel for increasing the likelihood of ignition occurring within the pump.
- 20 14. A pump according to any of Claims 11 to 13, wherein the injection means is arranged to inject the fluid stream between adjacent stages of the pump.
- 25 15. A pump according to any of Claims 11 to 14 when dependent from Claim 8, wherein the fluid stream is injected into the combustion chamber.
- 30 16. A method of treating a fluid containing a fuel, the method comprising conveying the fluid to a vacuum pump and, within the pump, igniting the fuel to regulate the concentration of the fuel in fluid exhaust from the pump.

**ABSTRACT**

A multi-stage vacuum pump comprises, between adjacent stages of the pump, a  
5 continuous ignition source for igniting a fuel within a pumped fluid. This can  
ensure that the concentration of the fuel in fluid exhaust from the pump is below its  
lower explosive limit.

(Figure 2)





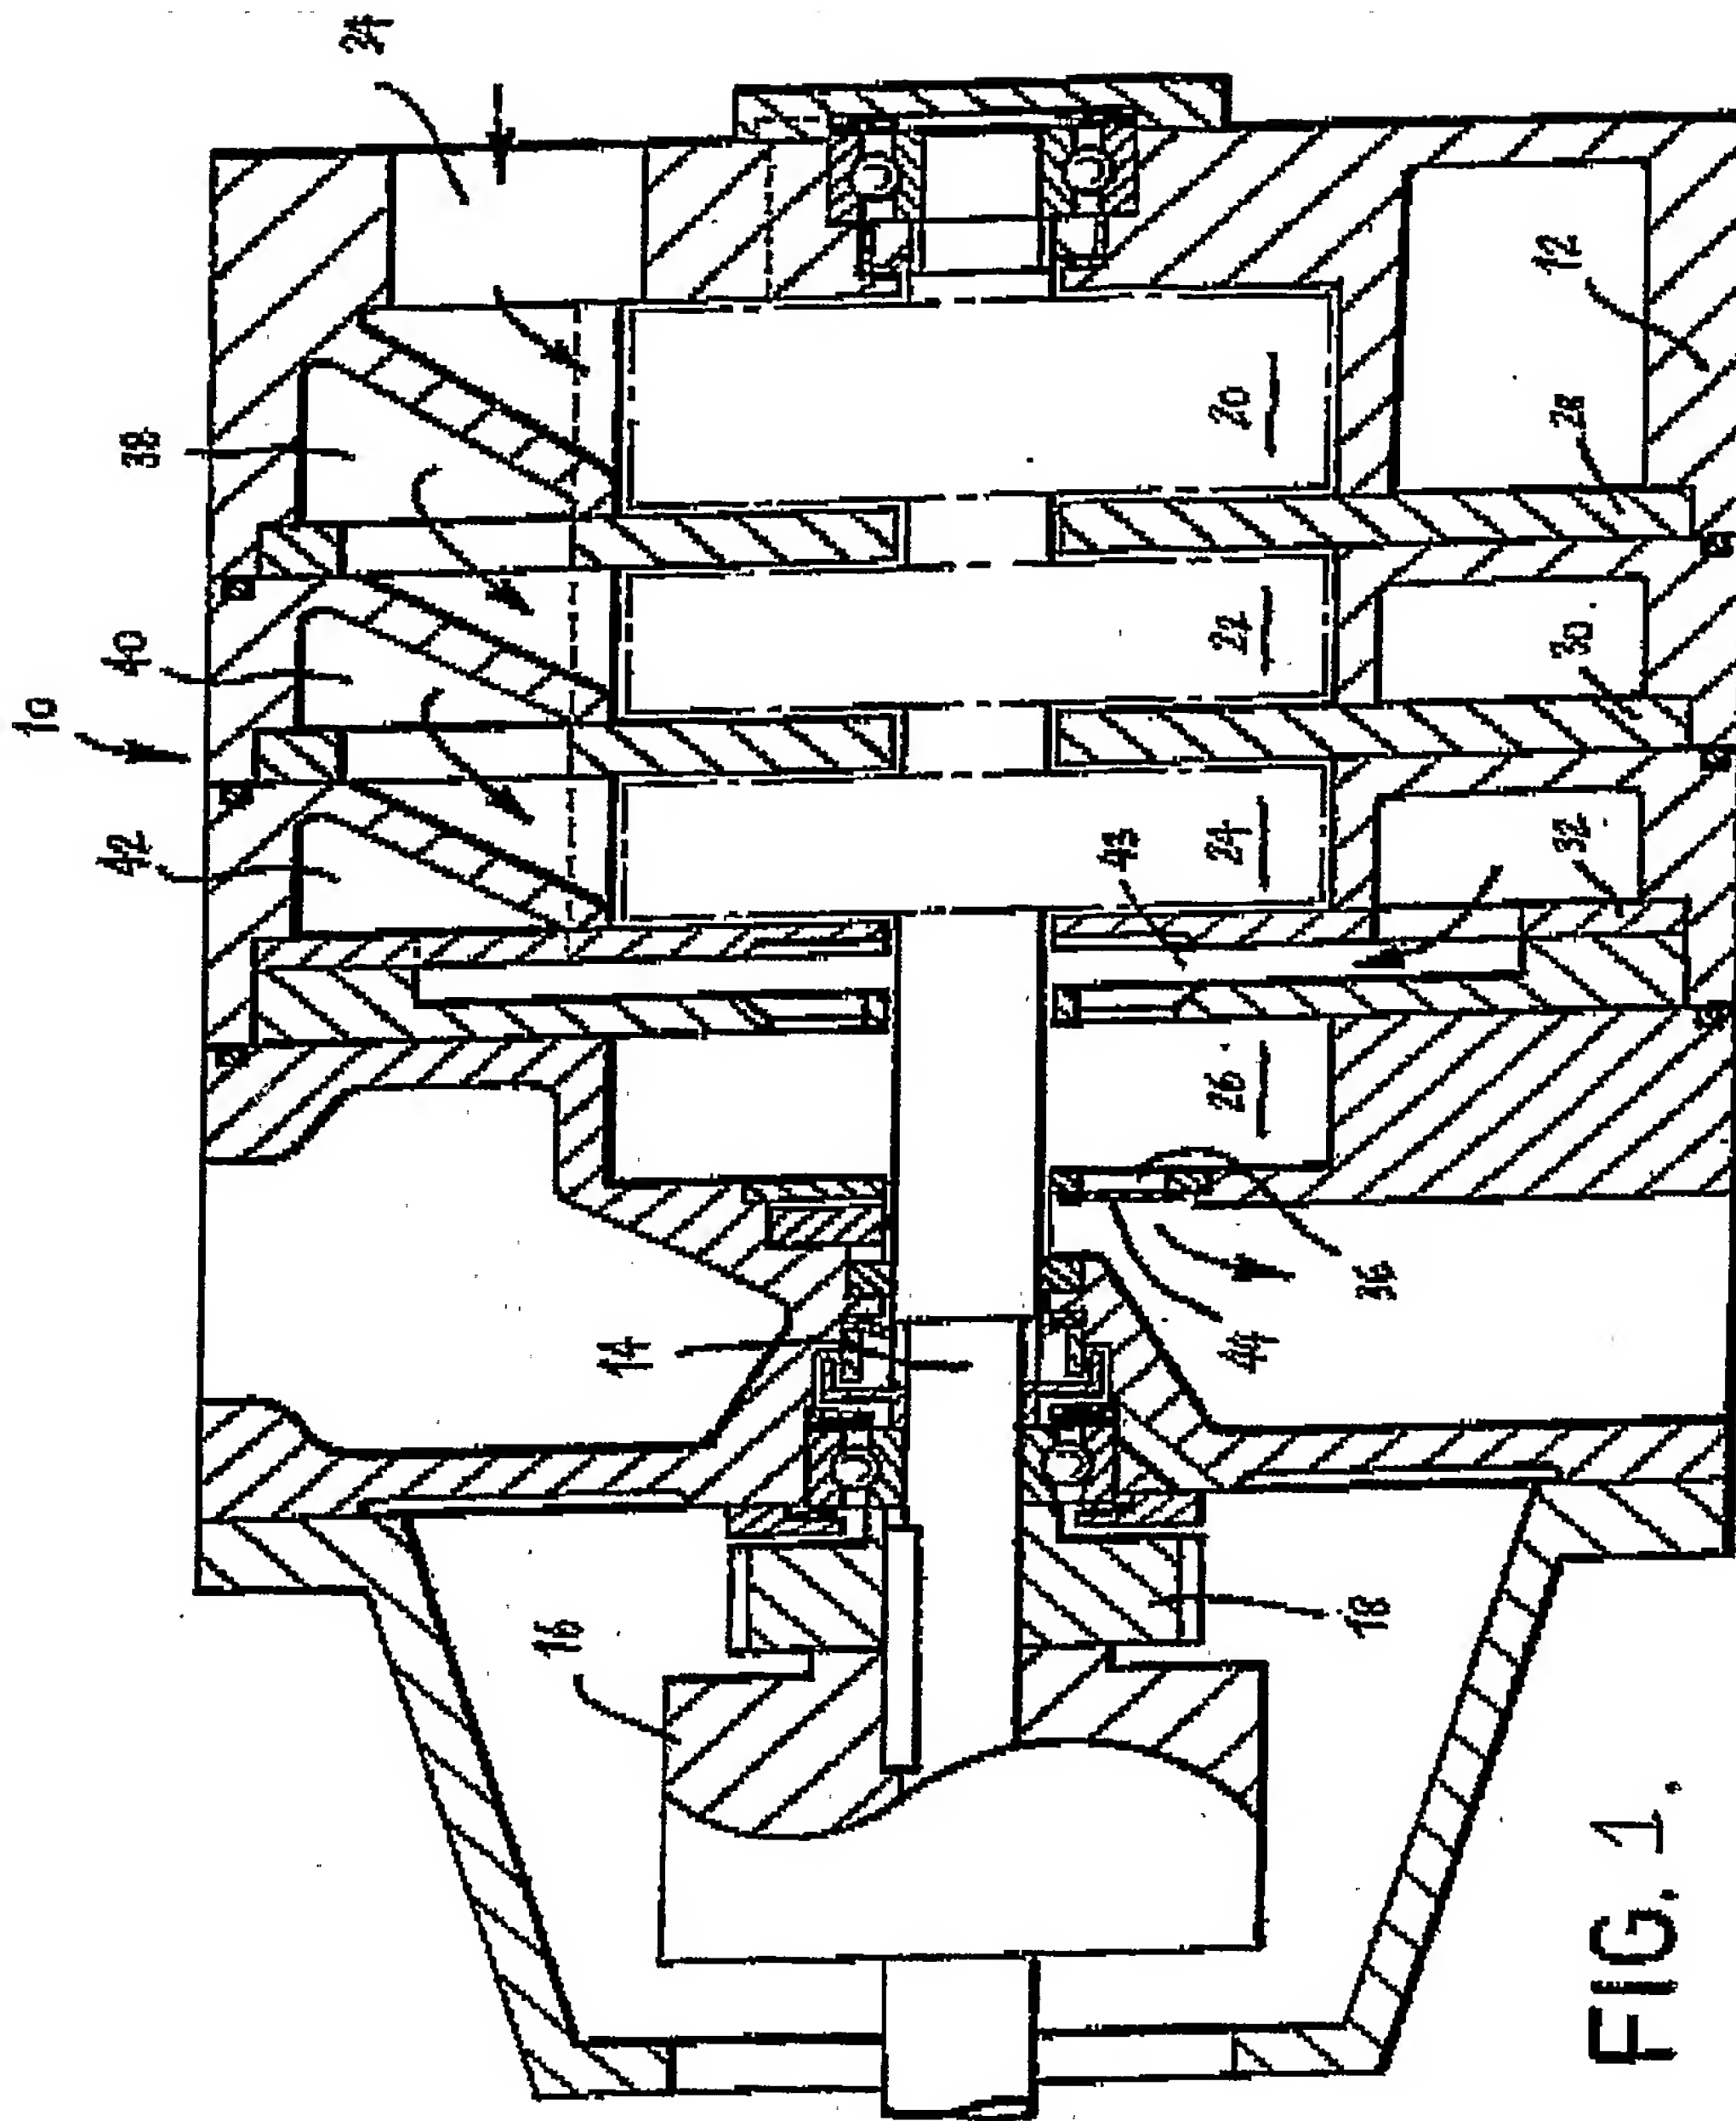


FIG. 1.  
(PRIOR ART)



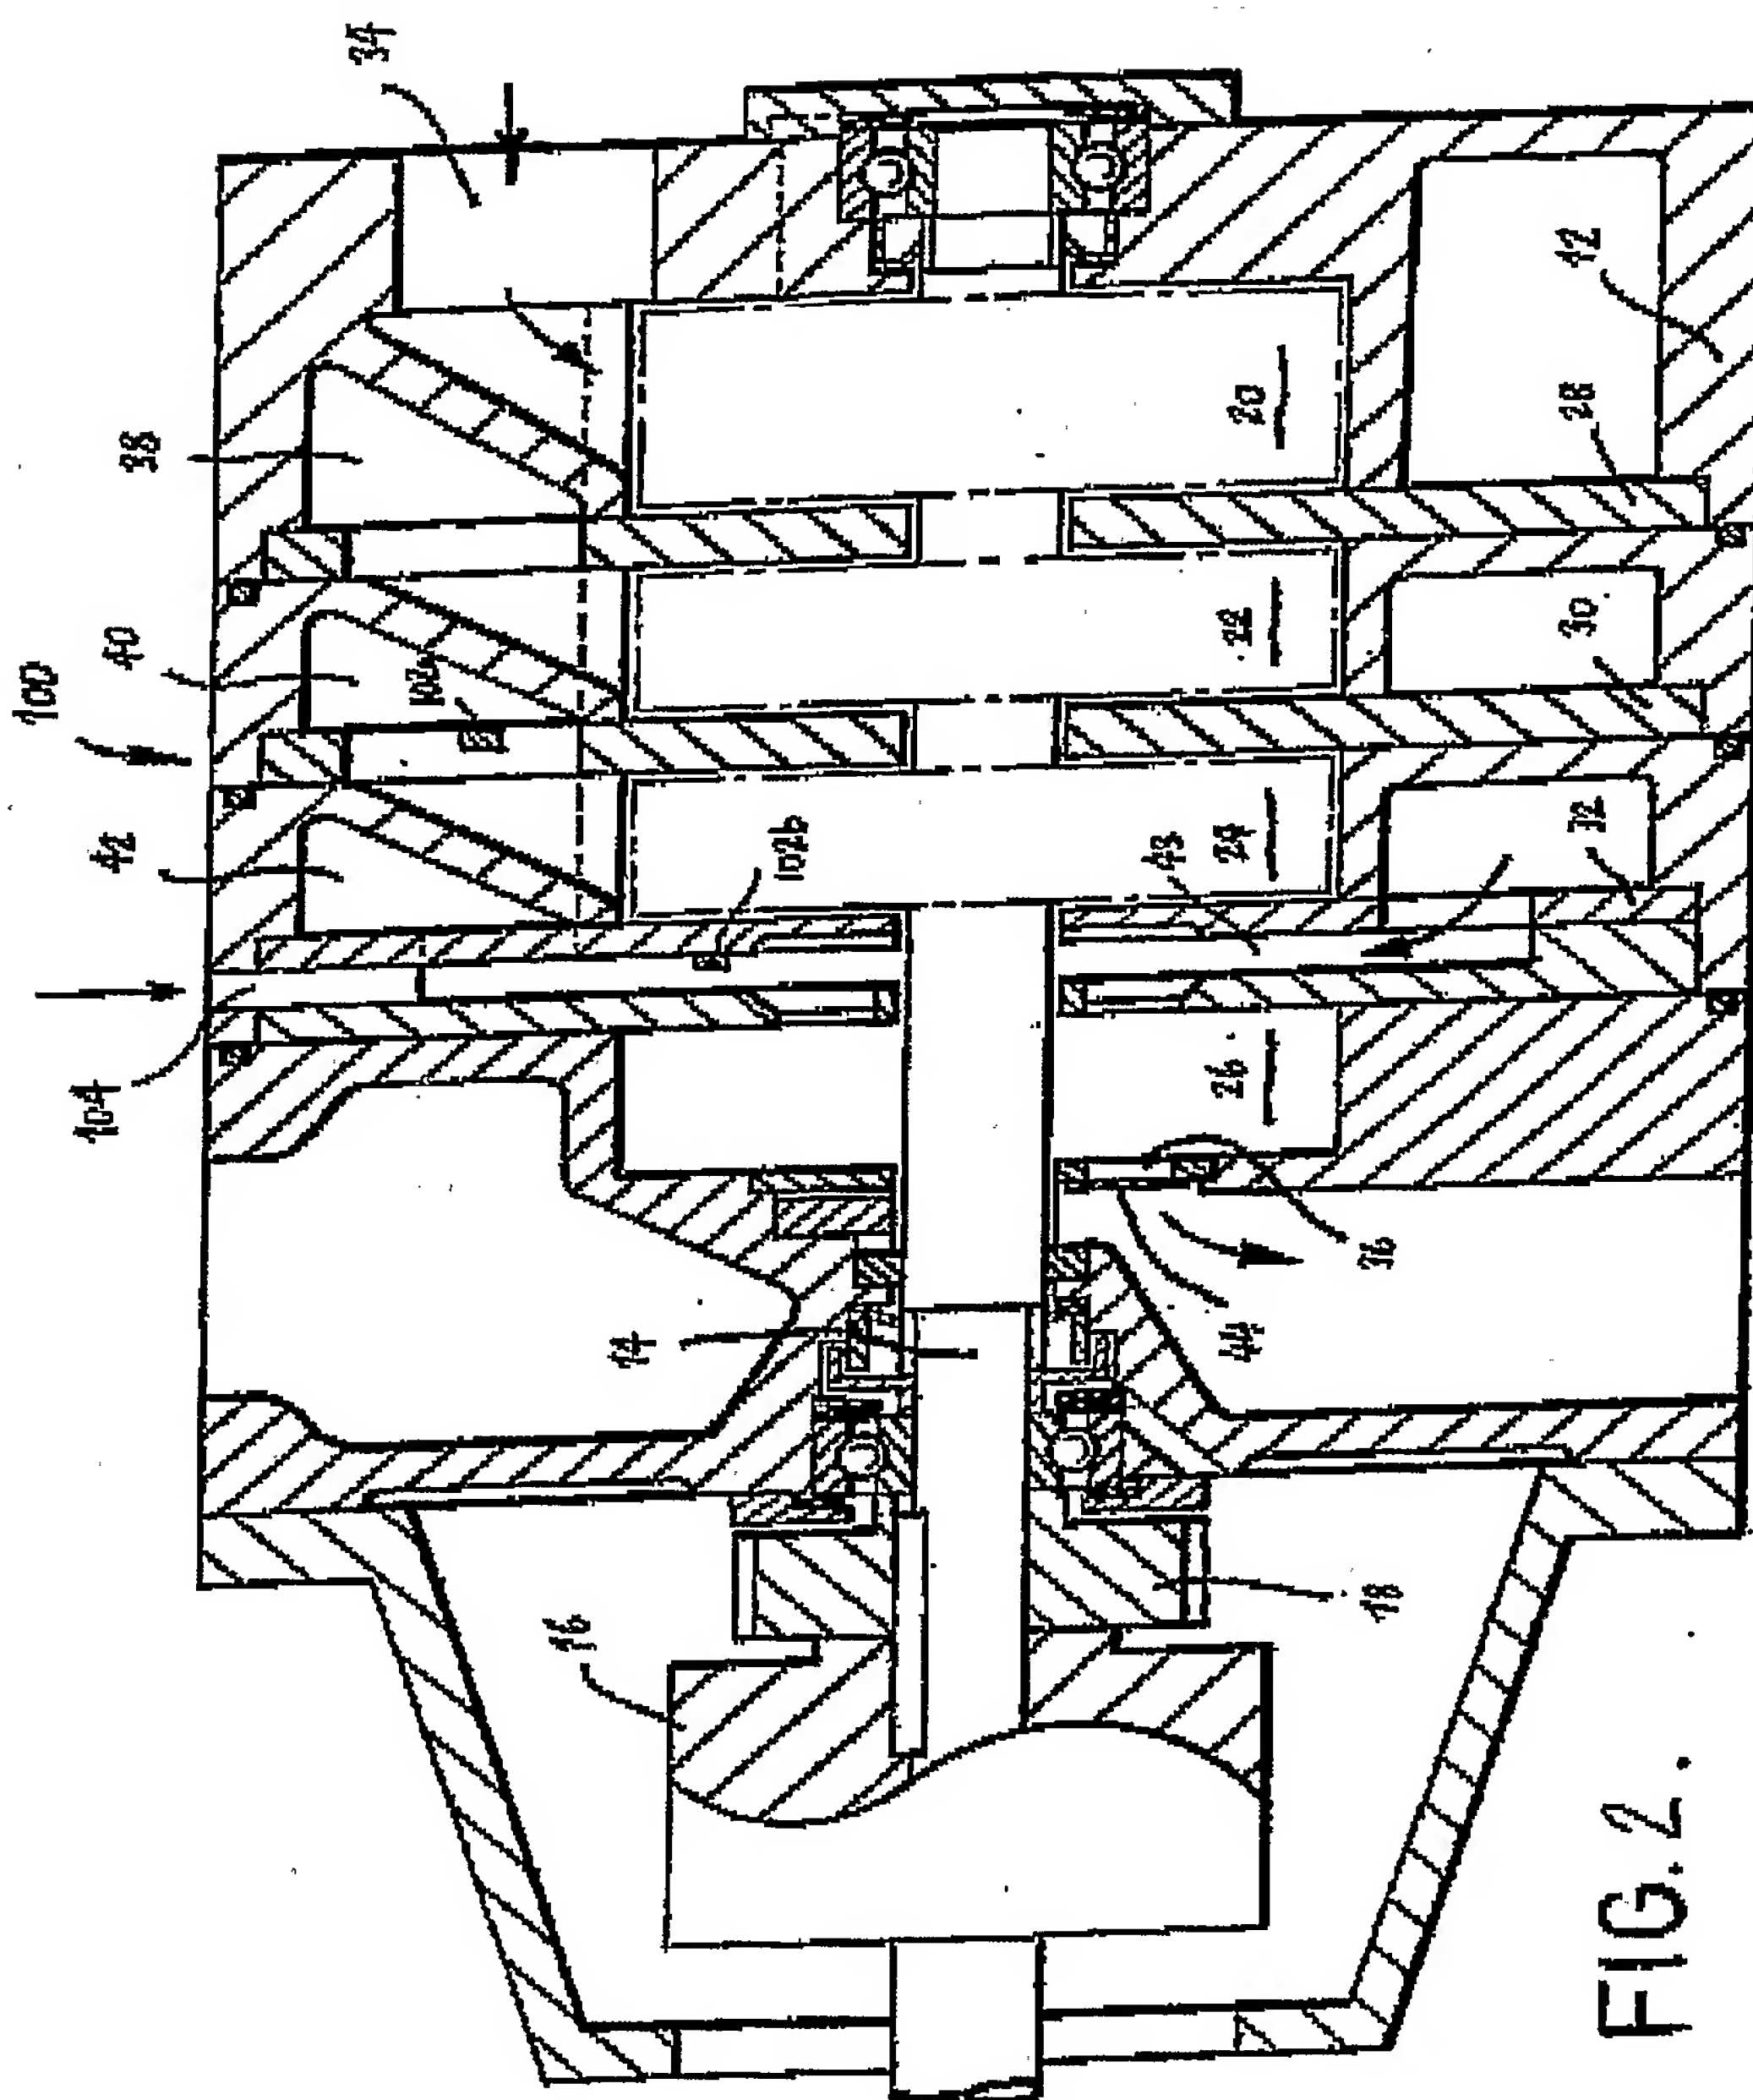


FIG. 2.



